

Honda CRF 1000 Africa Twin 2016

INSTALLATION INSTRUCTIONS







Attention: For a correct RB feeding voltage, check the operation of all motorbike electrical system components (lights, fuse, stock connectors, etc.).

- 1. Turn off the engine.
- 2. Remove the seats and the fuel tank.

Injection / Feeding voltage section _____

3. Locate and disconnect the black 2 pin connector and the blue 2 pin connector (Fig.1).



Fig.1

4. Connect the Rapid Bike connectors in-line with the stock harness and the injectors (**Fig.2**). Follow this order:

INJECTOR 1 – left injector (black connector)INJECTOR 2 – right injector (blue connector)



Fig.2

Issued by: PM approved by DG Rev.00 date 09/03/16 pag. 2/8





Crankshaft sensor section _____

5. Locate and disconnect the red 2 pin connector placed under the seat (Fig.3).



Fig.3

6. Connect the Rapid Bike connectors in-line with the stock harness (Fig.4).



Fig.4

Issued by: PM approved by DG Rev.00 date 09/03/16 pag. 3/8





_ T.P.S. section _____

7. Locate the black 3 pin connector placed on the left side (Fig.5).



Fig.5

8. Connect the green wire of the Rapid Bike harness to the blue wire with yellow stripe on stock connector, using the provided posi-tap connector (**Fig.6**).



Fig.6

Issued by: PM approved by DG Rev.00 date 09/03/16 pag. 4/8





O2 sensor section _____

9. Locate and disconnect the black 4 pin connector placed down on the right side near the coolant tank cap (**Fig.7**).



Fig.7

10. Connect the Rapid Bike connectors in-line with the stock harness (Fig.8).



Fig.8

Issued by: PM approved by DG Rev.00 date 09/03/16 pag. 5/8





Final section _____

11. Connect the eyelet of the Rapid Bike harness to the chassis ground bolt (**Fig.9**).



Fig.9

- 12. Connect the Rapid Bike module to the wiring.
- 13. Check the correct connection of all connectors.
- 14. Place the Rapid Bike module under the passenger seat (Fig.10).



Fig.10

15. Place back the fuel tank and the seats.

Issued by: PM approved by DG Rev.00 date 09/03/16 pag. 6/8






___ Installing instructions _____
Accessories section _____

The Rapid Bike wiring has four other connections for the accessories:

- Connection for the quickshifter sensor (black 3 pin connector)
- Connection for the handlebar switchmap (black 2 pin connector)
- Connection for the CAN Bus interface (white 3 pin connector)
- Connection for the USB interface (white 4 pin connector)

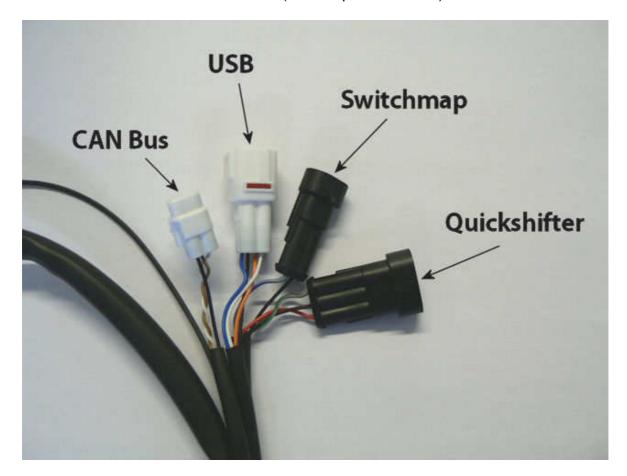

Issued by: PM approved by DG Rev.00 date 09/03/16 pag. 7/8

Dimsport Srl

Zona Industriale Madonnina - Loc. San Iorio 15020 SERRALUNGA DI CREA (AL) - ITALY T (+39) 0142.9552 F (+39) 0142.940094 www.dimsport.it

RapidBike

ASSISTENZA TECNICA – TECHNICAL SUPPORT

Tel. (+39) 0142.9552 E-mail: support.rapidbike@dimsport.it

UFFICIO COMMERCIALE - COMMERCIAL DEPT.

Tel. (+39) 0142.9552 E-mail: info.rapidbike@dimsport.it



a company of una azienda del gruppo



www.rapidbike.it