
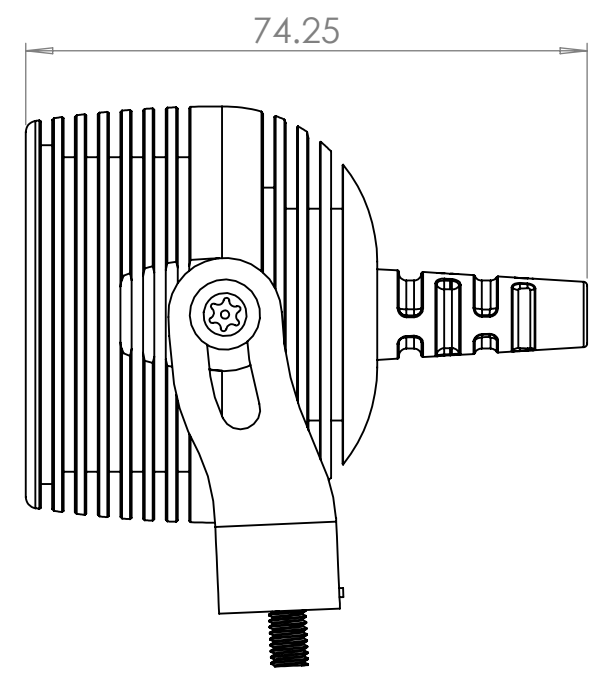
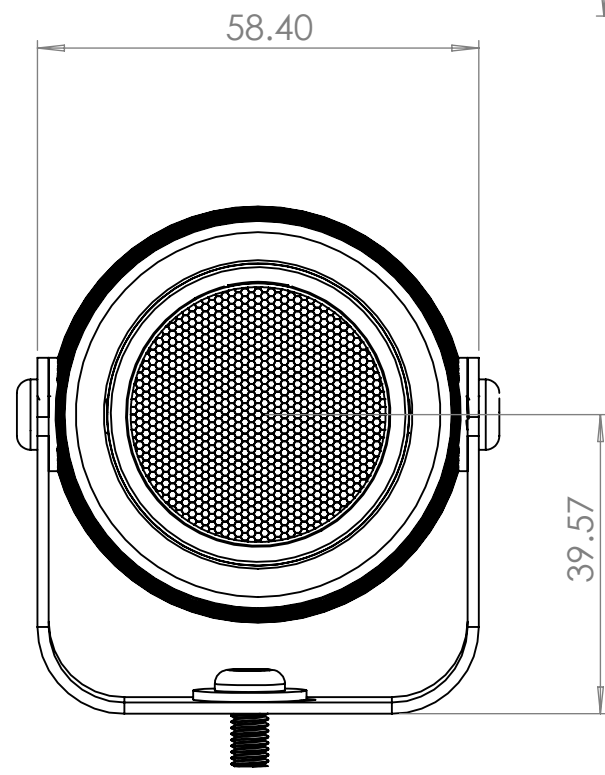
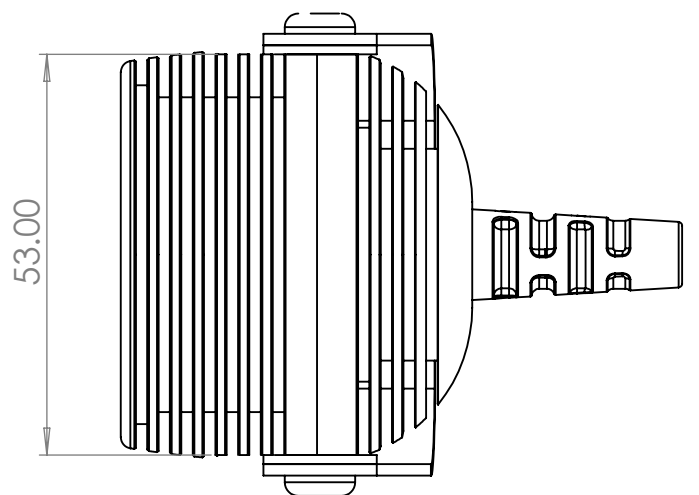


AMR3ADV

Weight	200grams
Output	3580 Lumens
EZcan	EZcan Compatiable
IP rating	IP69K
Light temp	5700K - Bright White
Warranty	7 year
3x Cree leds	XHP35.2HD (50,000+ hours)
Lens	3mm Toughened glass
Connector	Te Connectivity super seal
Amp draw @12V	2.5amp
Fixings	2x M5 fixing points
ITM	Intelligent thermal managment
Protective coating	Hard anodised black
Casing	6063 Aluminium
Minimum operating voltage	10.6V
Maximum operating voltage	14.4V
Minimum ambient operating temperature	-10degC
Maximum ambient operating temperature	40degC
Maximum body temperature (no air flow)	55degC
PWM 100% duty cycle	Off
PWM 50% duty cycle	50% power
PWM 0% duty cycle / signal 0v	100% power

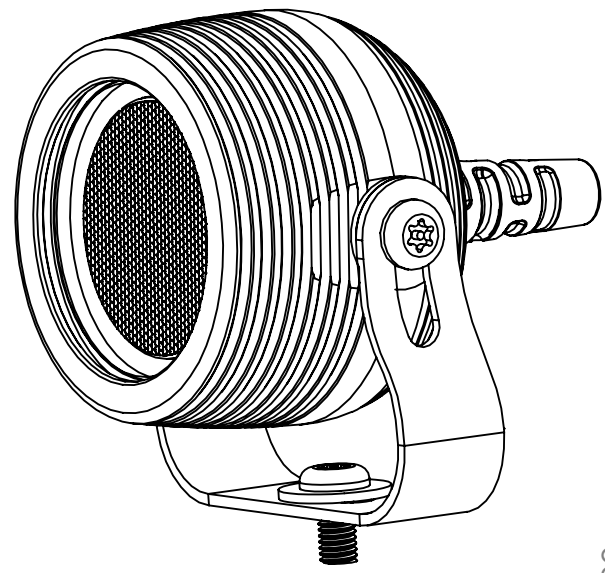

FINISH:
DEBURR AND BREAK SHARP EDGES

QUANTITY:

REVISION

Date: 04/04/2025

Manufacturer:
Ultimate Sports Engineering
Ltd.
Unit 4
Bury Mill Farm
Bury Gate
Pulborough
West Sussex
RH20 1NN



Unless Otherwise Specified
Dimensions are in: mm
Tolerance: X.XX ±0.1, X.X ±0.15, X ±.5
Linear: ±0.5
Angular: ±0.1
Do Not Scale Drawing

NAME	JT	SIGNATURE	DATE
DRAWN			
CHK'D			
Information Contained in this drawing is the property of USE-EXPOSURE. Any reproduction in part or whole without the written permission od USE-EXPOPSURE is prohibited.			

Please refer to 3D data for more details, If in doubt ask.

MATERIAL:

WEIGHT:

TITLE: AMR3ADV	
DWG NO. AMR3ADV	A3
SCALE:1:5	SHEET 1 OF 1